

1999 Toyota RAV4 clock removal instructions



Reccomended Tools: small flatblade screwdriver & stubby #2 phillips screwdriver

Estimated time for removal is 15 minutes

STEP # 1



STEP #1

REMOVE 3 PHILLIPS SCREWS & THE 2 ASSOCIATED TRIM PIECES

#1 Holding the instrument cluster trim ring. #2 & #3 Holding the stereo trim cover ring.

STEP # 2



STEP # 2

REMOVE CONTROL KNOBS (1-4) (ABOVE PHOTO SHOWN WITH KNOBS ALREADY REMOVED).

GENTLY PRY UP BACK COVER PLATE (5) & REMOVE.

UNPLUG & REMOVE A/C CONTROL SWITCH (6) IF APPLICABLE.



PHOTO SHOWING PIECES REMOVED IN STEP 2


STEP # 3



STEP # 3

GENTLY PULL ENTIRE DASH ASSEMBLY LOOSE, TO EXPOSE THE CLOCK

STEP # 4

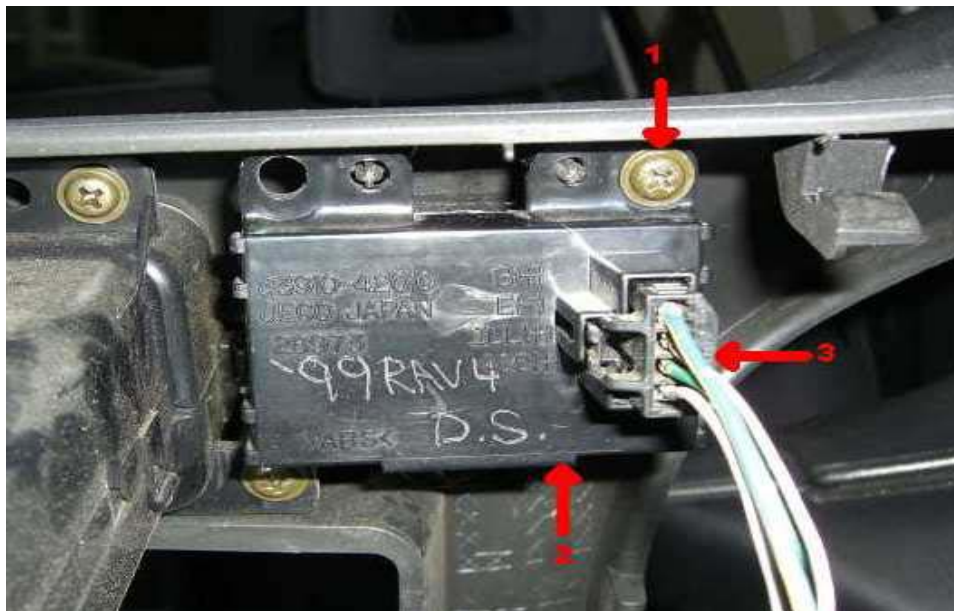

STEP #4

REMOVE 2 PHILLIPS SCREWS (1-2) THAT RETAIN THE CLOCK ASSEMBLY
UNPLUG ELECTRICAL CONNECTOR (3) & REMOVE THE CLOCK